

Anchoring




ANCHORS

Veneer anchors are manufactured with an integral back section to ensure positive lateral loading is transferred to the structural backup, minimizing the amount of veneer deflection. Protruding front section of anchor is corrugated to provide max rigidity and strength in the tie slot. Mounting holes are 1/4" diameter for screw type installation to structural steel framing, wood framing or concrete materials. Wire ties installed with the anchor plate are available in various projection sizes 3" to 9".



Adjustable anchors are produced with an open back and used to anchor masonry to various types of structural backup. Open back anchors are suitable in applications when backup materials are adequate to resist positive exterior loads on masonry and minimize the amount of deflection. Anchor front section is corrugated to add strength and rigidity. 1/4" diameter holes are provided in flat sections of anchor for attachment purposes. Wire ties installed with open back anchors are available in various projection sizes 3" to 9".

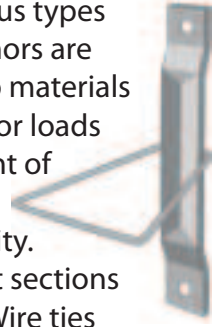


Dovetail anchor is a factory assembled product consisting of a specified size of wire tie and a dovetail shaped anchor attached to the tie. This anchor and tie assembly is designed under normal conditions to be installed in conjunction with a pre-installed dovetail slot to anchor masonry veneer to a poured concrete backup. A 5/16" diameter hole is provided in the center of the dovetail anchor for alternate attachment purposes when required. Projection sizes of wire ties are 3" to 9". A tie size must be specified when placing an order for this type anchor.



Highchair Anchor is designed with slotted holes in protruding front tabs providing a rigid backing for a wire pintle tie installed with the anchor. Two 1/4" diameter holes located in the back portion of the anchor are used for attaching the anchor to the backup material. Pintle ties used with the RB14 anchor are manufactured with two vertical leg extensions, 1 5/8" in length, which provide a means of adjustment for tie to properly line up with a mortar joint when veneer is applied. Pintle ties are available in projection sizes of 3", 4", and 5".



MISCELLANEOUS ANCHORS & CHANNEL SLOTS

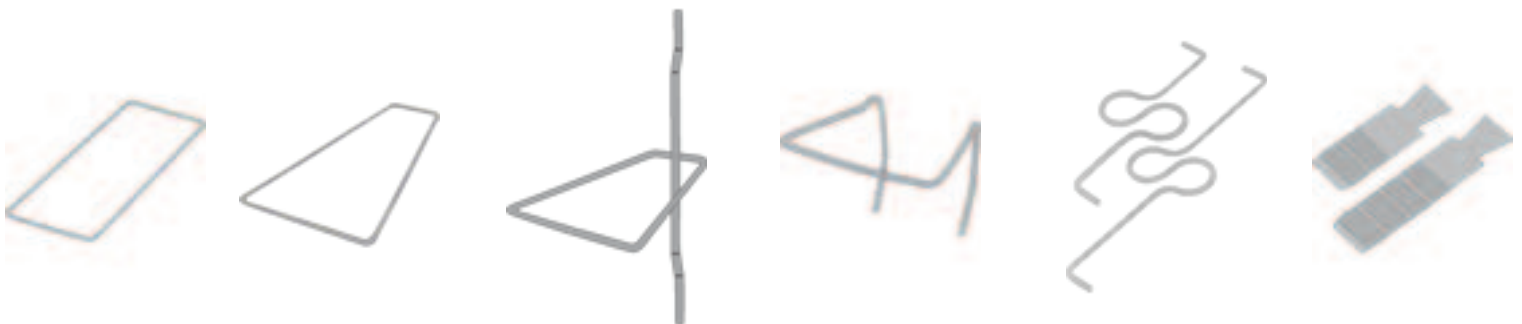

Kansas City Corporate Headquarters, 2440 W. Pennway, Kansas City, Missouri 64141 816-471-2570 800-444-2570 816-421-2946 (FAX)

Olathe
19930 W. 157th St.
816-471-2570
800-444-2570
Fax: 913-768-0371

Wichita
4311 W. 29th Cir. S.
316-942-6712
800-829-1201
Fax: 316-942-1414

Springfield
2035 West Vista
417-865-7184
800-323-7184
Fax: 417-865-7186



Columbia
5250 Hwy 763 N.
573-449-5204
888-375-7109
Fax: 573-449-7736

Collinsville
1700 St. Louis Rd.
618-398-4377
800-642-2651
Fax: 618-397-7385

St. Louis
1441 N. Warson Rd.
314-423-6550
800-359-1201
Fax: 314-423-7548